


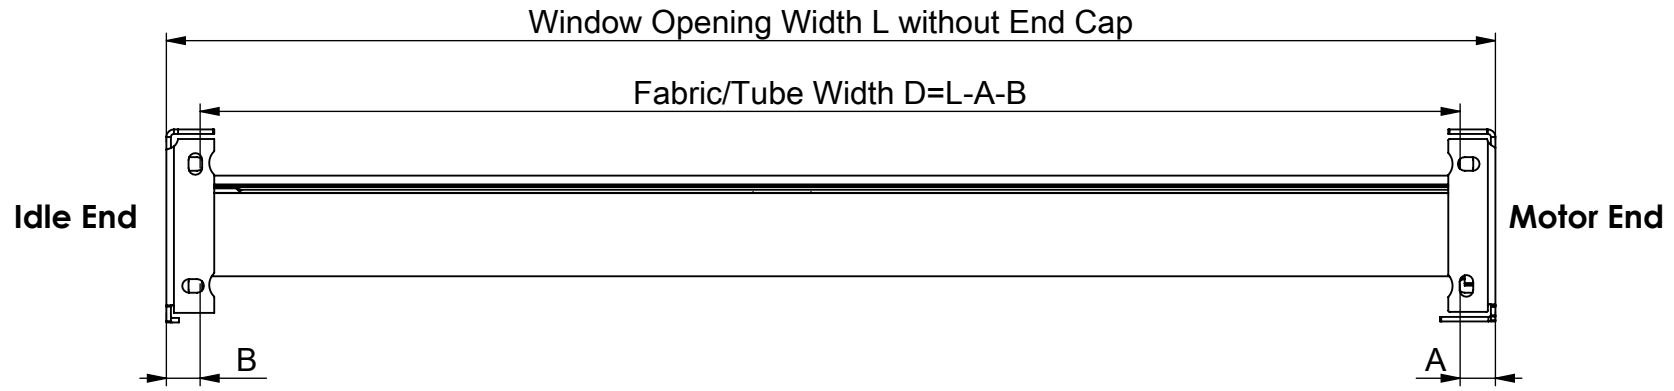



Fabric/Tube Deduction



Single Band

No.	Components and Item No.	A	B	Deduction=A+B
1	3" Bracket RS-UB1~5/RS-UIA~E Motor bracket adaptor plate RS~B58/B60 Idler RS~016/018 , or RS~027/040	17.90mm (11/16")	14.2mm (9/16")	32.1mm (1-1/4")
2	3" Bracket RS-UE1~5/RS-UEA~E Slice plate RS~YG4 Plug end Z-10B/10F , or Z-10A/10B	13.30mm (9/16")	13.7mm(9/16")	27.0mm(1-1/8")
			15.6mm(5/8")	28.9mm(1-3/16")
3	3" Bracket SP-A01~05/SP-C01~05 Motor bracket adaptor plate RS-B58/B60 Idler RS-016/018 , or RS-027/040	13.30mm (9/16")	14.2mm (9/16")	27.5mm (1-1/8")
4	3" Bracket XL-D11~5/XL-D61~5 Motor bracket adaptor plate RS-B58/B60 Idler RS-016/018 , or RS-027/040	17.04mm (11/16")	14.2mm (9/16")	31.24mm (1-1/4")
5	3" Bracket with slice plate RS-VL1~5 Idle end 3" bracket RS-VM1~5 Retractable coupler CM-006/009	13.30mm (9/16")	22mm (7/8")	35.30mm (1-7/16")

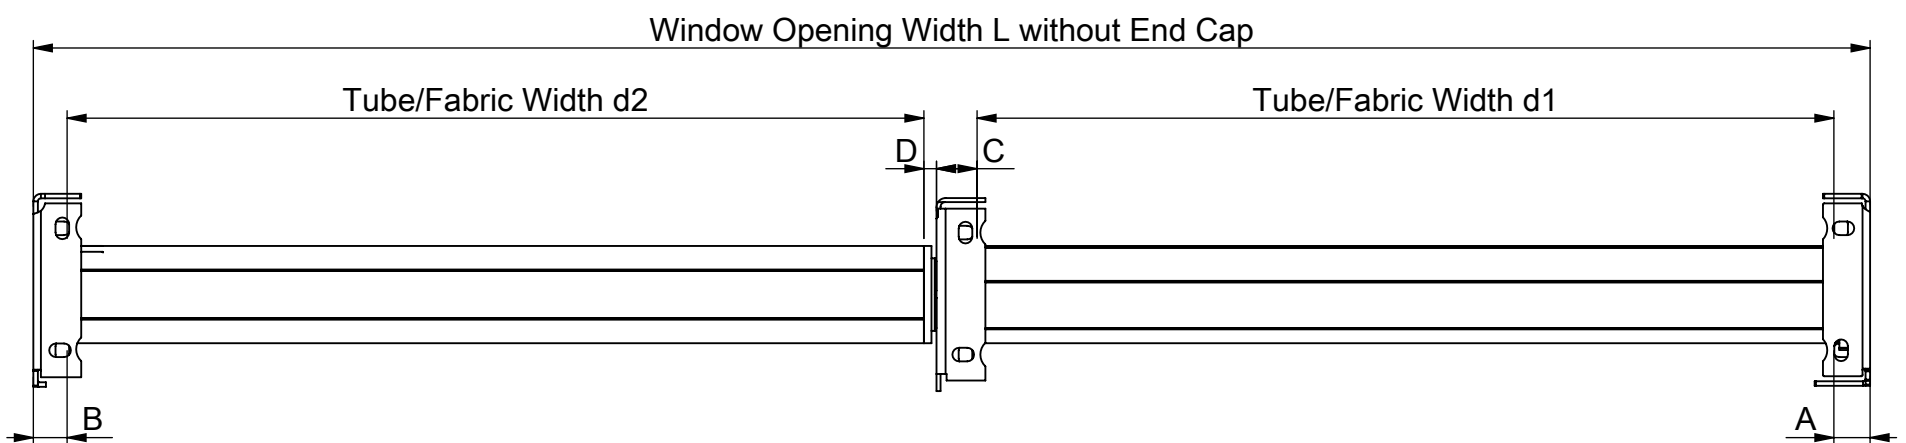

Multi Band	Components and Item No.	C	D	Deduction=A+B+C+D
Intermediate	3" Intermediate Fascia Bracket RS-WBA~E/RS-WB1~5 1-1/2" Idle End for Intermediate Bracket RS-WQ5/ RS-WQ1	17.2mm (11/16")	5mm (1/4")	A+B+22.2mm (A+B+7/8")
Center Support	3" Center Support Fascia Bracket RS-WCA~E/RS-WC1~5 1-1/2" Idle End for Center Support Bracket RS-WQ6/ RS-WQ3	14.9mm (5/8")	13.9mm (9/16)	A+B+28.8mm (A+B+1-1/8")

Note: Multi band deduction A, B refer to single band chart
Tube/Fabric Width $d1+d2=L-A-B-C-D$